
<u>NEW!!</u> LABINCO LD208450 Rolling Bench 450 mm long rolls, with very strong motor up to 60 Kg, 600 Rpm and touchscreen!!

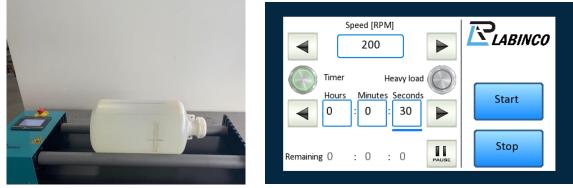

Technical data


Number of rolling positions rolling quantity max. Motor rating input Motor rating output Speed display Speed range Timer display Heat output Heating rate Heating temperature range Heat control Heat control accuracy Speed control Adjustable safety circuit min. Adjustable safety circuit max. Connection for ext. temperature sensor Control accuracy with sensor Temperature constancy in medium Set-up plate material Set-up dimensions Dimensions (W x D x H) Weight Permissible ambient temperature Permissible relative humidity Protection class according to DIN EN 60529 RS 232 interface Product number Voltage Frequency Power input

1 up to 460 kg 250W 175 W Digital 1-600 rpm digital 1s. up to 999h 59m 59s Digital Steel with PE coated 12 up to 2150 mm 680 x 350 x 130 mm 9.4 kg 5 - 50 °C 80 % IP 42 _ 20845 220 - 230 V 50/60 Hz 300W

NEW!! LABINCO LD208 Rolling Bench with very strong motor up to 60 Kg, 600 Rpm and touchscreen!!

Description;

Rolling benches with standard 2 rolls Ø 46MM, one roll is driven, extra rolls available on request.

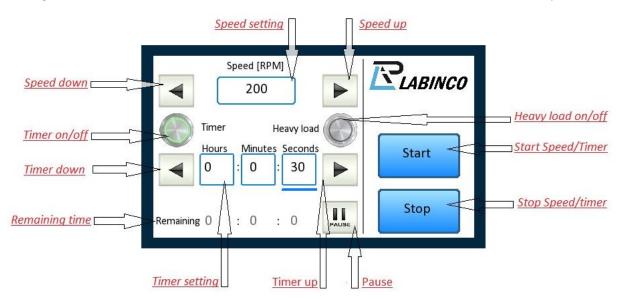

<u>Operating instructions</u>: Carefully unpack the unit and take off all packing materials. Choose a flat table or other suitable are for placing the Rolling bench. Check the model and catalog number indication at the rear. Check the line voltage in the room with the specified voltage on the label, this is standard 230 volts 50/60 HZ. Plug the line-plug into a suitable wall contact, with earth. Switch on the main switch. Pilot-lamp will light green if the bench is switched on.

This bench is equipped with standard 2 rolls diam. Ø 46 mm, extra rolls available on request. One roll is driven. You can easily place maximal 5 rolls on the rolling benches.

The first roll is driven, and the next roll is driven with the bottle or tube of the first roll, and the next also.... etc.

The minimal diam. is 12 mm up to But maximal 60 Kilogram

<u>Settings:</u> You can easily set the speed or the time setting with the button "up" or "down" and if you are ready for start them, than push the start button, and if you will stop then , then push on the stop button. You can also for setting the speed or the timer function to touch the screen on the bleu speed screen or timer screen, then the next screen will open for the setting.

LABINCO BV	P.O.BOX 3259	4800DG	BREDA	THE NETHERLANDS	
	ZINKSTRAAT 64	4823AC	BREDA	THE NETHERLANDS	
	TEL;0031(0)76-54	TEL;0031(0)76-5417582 E-mail; Info@labinco-bv.com		FAX;0031(0)76-5420173	
	<u>E-mail; Info@lab</u>			http;//www.labinco-bv.com	